



M275

CONT 250 kVA



THREE-PHASE SYNCHRONOUS GENERATOR

Datasheet for 4 poles -50Hz @ 1500rpm/ 60Hz @ 1800rpm

Ambient Temperature	40 °C	Method of Cooling				Air cooling			
Temperature Rise	125 °C	Direction of Rotation				Clockwise			
Insulation Class	H	Maximum Over-speed				2250r/min			
Power Factor	0.8	Degree of Protection / Enclosure				IP21			
Excitation	Brushless	Altitude				1000m			
Winding Pitch	2/3	Stator winding				DLL			
Pole	4	Number of Terminal				12			
Duty	S1- Continuous	Rotor				With damping cage			
Waveform	TIF<50				THF<2%				
Waveform distortion	BS EN 61000-6-2&BS EN 61000-6-4,VDE 0875G,VDE0874N								
Radio interference	Noload<1.5%,Non-distorting balanced linear load<5%								
AVR MODEL AVR	Standard	Selection				PMG			
	SX460	AS440	KRS440	MX341B	MX321				
Voltage Regulation - in steady state condition	±1.0	±1.0	±1.0	±1.0	±0.5	±0.5			
Short Circuit Current Capacity	Control does not sustain a short circuit current				850A				
Electrical Characteristic									
Frequency	Hz	50				60			
Voltage (series star) Y	V	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage (parallel star) YY	V	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage (series delta) Δ	V	220	230	240	254	240	254	266	277
Rated power at Class H (125 °C) temperature rise	kVA	250	250	250	N/A	291	299	312.5	312.5
	kW	200.0	200.0	200.0	N/A	232.8	239.2	250.0	250.0
Efficiency at Class H (P.F.=0.8)	4/4%	92.4	92.7	92.8	N/A	92.6	92.8	92.9	93
	3/4%	93.3	93.4	93.3	N/A	93.3	93.4	93.4	93.4
	2/4%	93.4	93.3	93.2	N/A	93.2	93.2	93.1	93.1
Efficiency at Class H (P.F.=1.0)	4/4%	94.1	94.3	94.4	N/A	94.1	94.3	94.3	94.5
	3/4%	94.8	94.9	95	N/A	94.8	94.9	94.9	95
	2/4%	94.9	94.9	94.8	N/A	94.7	94.7	94.7	94.7
Reactances (%) at Class H									
Direct axis synchronous reactance unsaturated	Xd	2.825	2.55	2.369	N/A	3.161	2.903	2.776	2.55
Direct axis transient reactance saturated	X'd	0.132	0.119	0.111	N/A	0.148	0.136	0.13	0.119
Direct axis subtransient reactance saturated	X''d	0.086	0.078	0.072	N/A	0.097	0.089	0.085	0.078
Quadrature axis synchronous reactance unsaturated	Xq	1.263	1.14	1.059	N/A	1.413	1.298	1.241	1.14
Quadrature axis subtransient reactance saturated	X''q	0.152	0.137	0.127	N/A	0.17	0.156	0.149	0.137
Leakage reactance	X1	0.066	0.06	0.056	N/A	0.074	0.068	0.065	0.06
Negative sequence reactance saturated	X2	0.12	0.108	0.1	N/A	0.134	0.123	0.118	0.108
Zero sequence reactance unsaturated	X0	0.022	0.02	0.019	N/A	0.025	0.023	0.022	0.02
Short-circuit ratio	Kcc	0.3540	0.3922	0.4221	N/A	0.3164	0.3445	0.3602	0.3922
Short-circuit transient time constant (sec.)	T'd	0.049							
Subtransient time constant (sec.)	T''d	0.02							
Open circuit time constant (sec.)	T'do	1.27							
Armature time constant (sec.)	Ta	0.018							
Stator Winding Resistance (20°C)	ohm	0.01257							
Rotor Winding Resistance (20°C)	ohm	2.07							
Exciter Stator Resistance (20°C)	ohm	20							
Exciter Rotor Phase resistance	ohm	0.091							
No load excitation current	io (A)	0.5	0.52	0.6	N/A	0.5	0.51	0.52	0.53
Full load excitation current	ic(A)	2.4	2.4	2.5	N/A	2.4	2.4	2.5	2.5
Cooling air requirement	m ³ /sec	0.58m3/s 1230cfm				0.69m3/s 1463cfm			
Mechanical Characteristic									
Configuration	Single Bearing				Double Bearing				
Type of Construction	B2-SAE				IM B34				
Total Weight - kgs	688				678				
Weight wound stator - kgs	304				304				
Weight wound rotor - kgs	272.6				259				
Inertia (J) [kgm2]	2.3934kgm2				2.1102kgm2				
Drive end bearing / Lubrication					BALL.6315-2RS(ISO)				
Non-drive end bearing / Lubrication					BALL.6310-2RS(ISO)				
Packing crate size (cm)	115X63X94				120X63X94				


Winding 311 / 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	229.0	229.0	229.0	N/A	250.0	250.0	250.0	N/A	265.0	265.0	265.0	N/A	275.0	275.0	275.0	N/A
	kW	183.2	183.2	183.2	N/A	200.0	200.0	200.0	N/A	212.0	212.0	212.0	N/A	220.0	220.0	220.0	N/A
	Efficiency (%)	92.8	93.0	93.1	N/A	92.5	92.7	92.8	N/A	92.2	92.4	92.6	N/A	92.0	92.2	92.4	N/A
	kW Input	197.4	197.0	196.8	N/A	216.2	215.7	215.5	N/A	229.9	229.4	228.9	N/A	239.1	238.6	238.1	N/A

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	267.0	275.0	286.5	288.0	291.0	299.0	312.5	312.5	304.0	312.5	331.3	331.3	312.0	320.0	343.8	343.8
	kW	213.6	220.0	229.2	230.4	232.8	239.2	250.0	250.0	243.2	250.0	265.0	265.0	249.6	256.0	275.0	275.0
	Efficiency (%)	92.9	93.0	93.1	93.2	92.6	92.7	92.8	92.9	92.4	92.6	92.5	92.7	92.2	92.4	92.3	92.5
	kW Input	229.9	236.6	246.2	247.3	251.4	258.0	269.4	269.1	263.2	270.0	286.5	285.9	270.7	277.1	298.0	297.3

DIMENSIONS

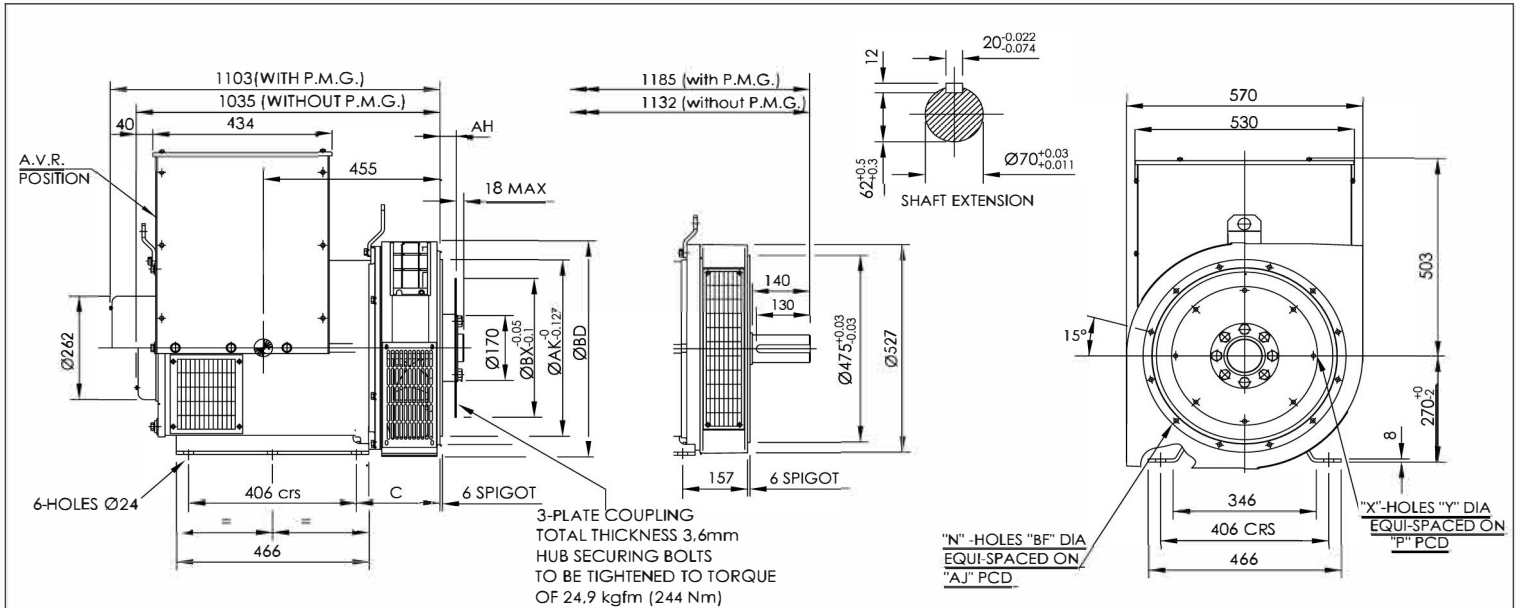

COUPLING DISC					
SAE	BX	P	X	Y	AH
14	466.72	438.15	8	13.5	25.4
11.5	352.42	333.38	8	11	39.6
10	314.32	295.28	8	11	53.8




FLANGE (mm)						
SAE号	BD	AK	AJ	BF	n	C
SAE3	451	409.58	428.62	11	12	202
SAE2	490	447.68	466.72	11	12	202
SAE1	553	511.17	530.22	12.7	12	216.3

VER	MOD	DRW	Date	1:1
Design	APP			A2
CHK	Date	2014/01		mm

50
Hz

Winding 311





THREE PHASE EFFICIENCY CURVES

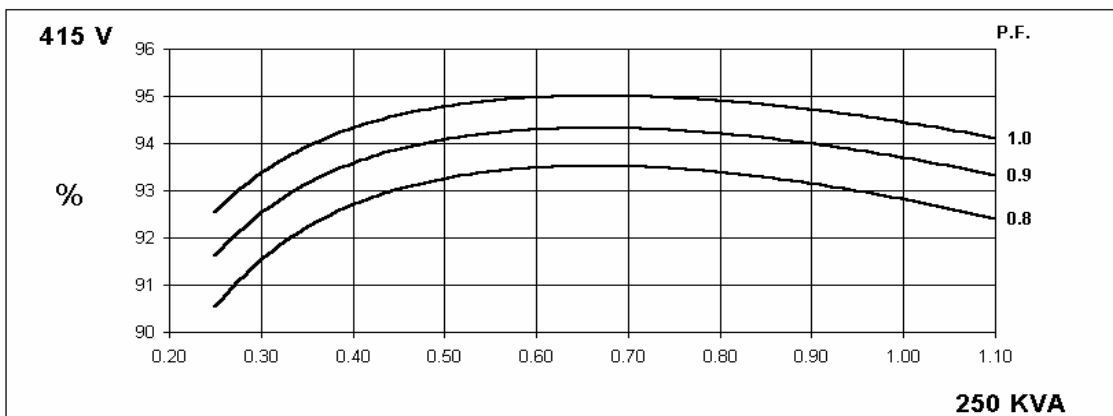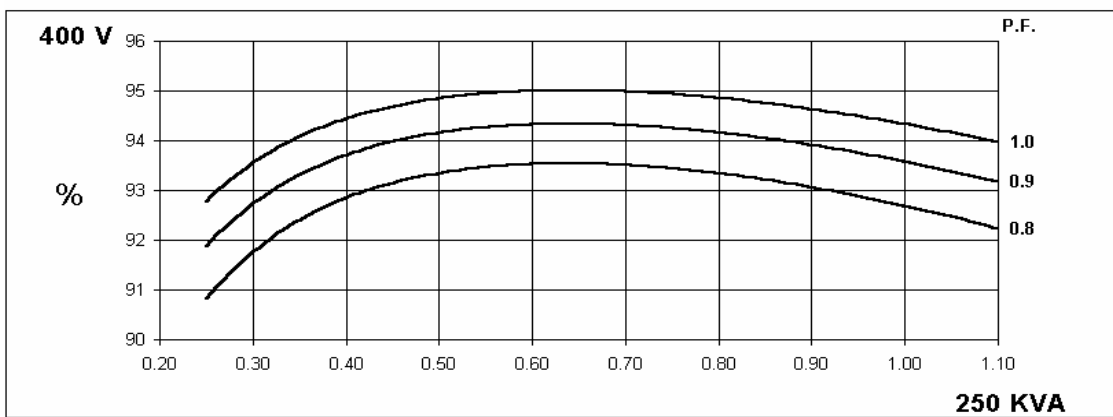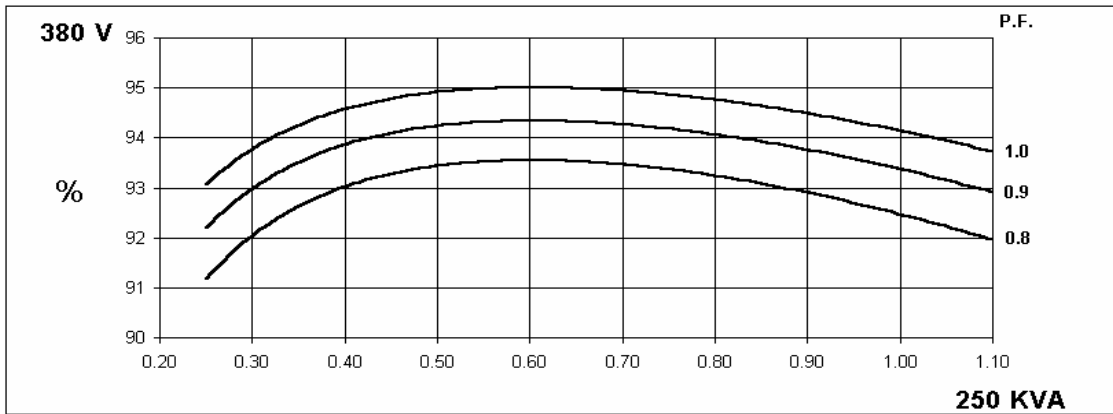

60
Hz


Winding 311

THREE PHASE EFFICIENCY CURVES

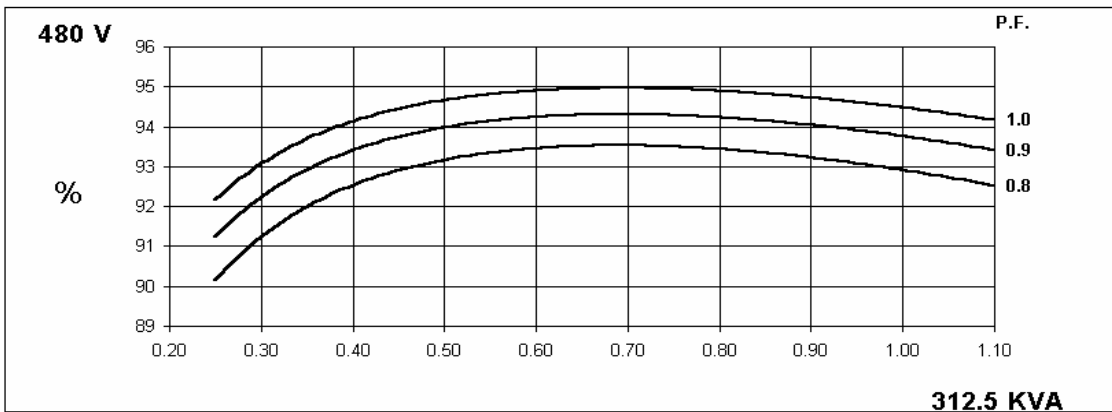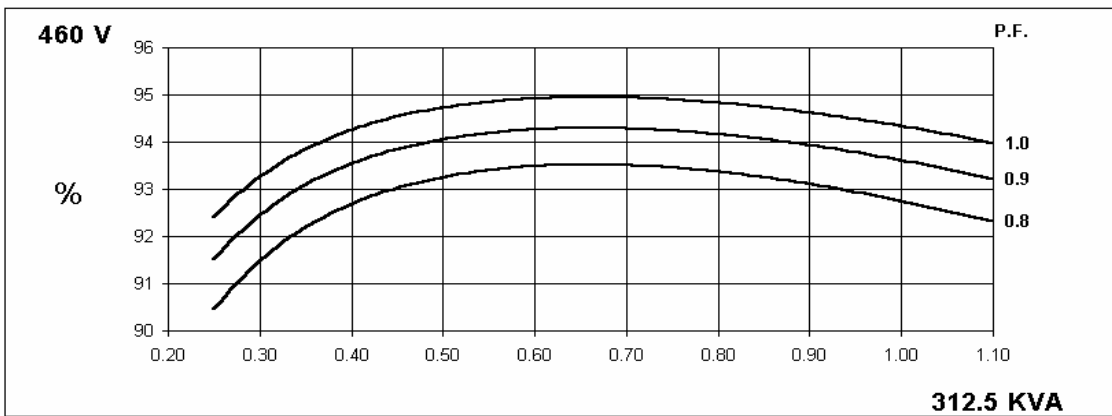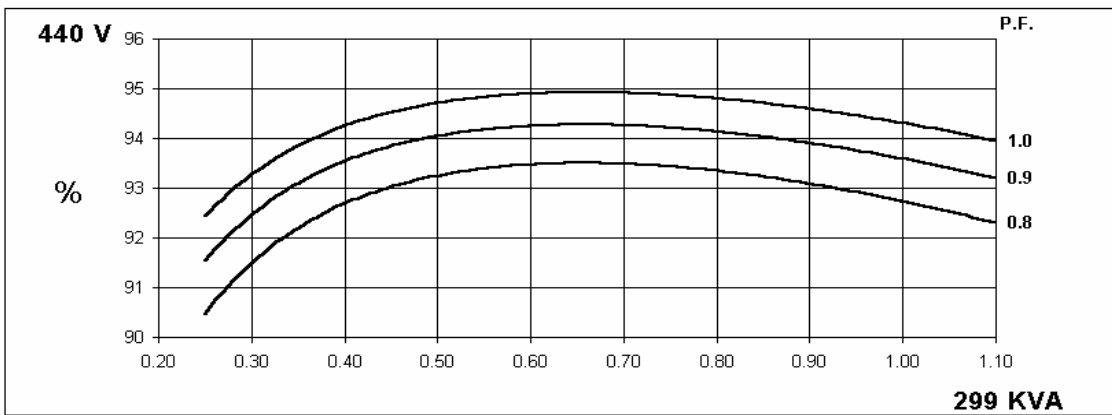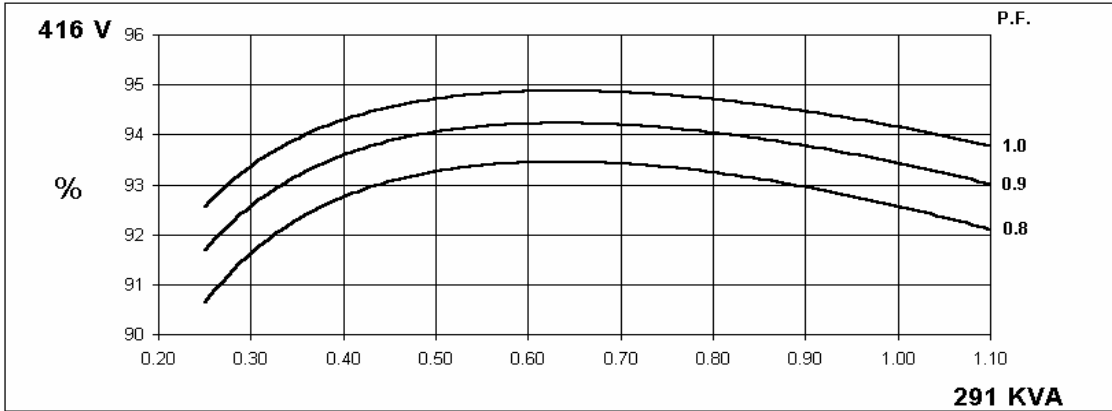


Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed Based on star (wye) connection.

50
Hz

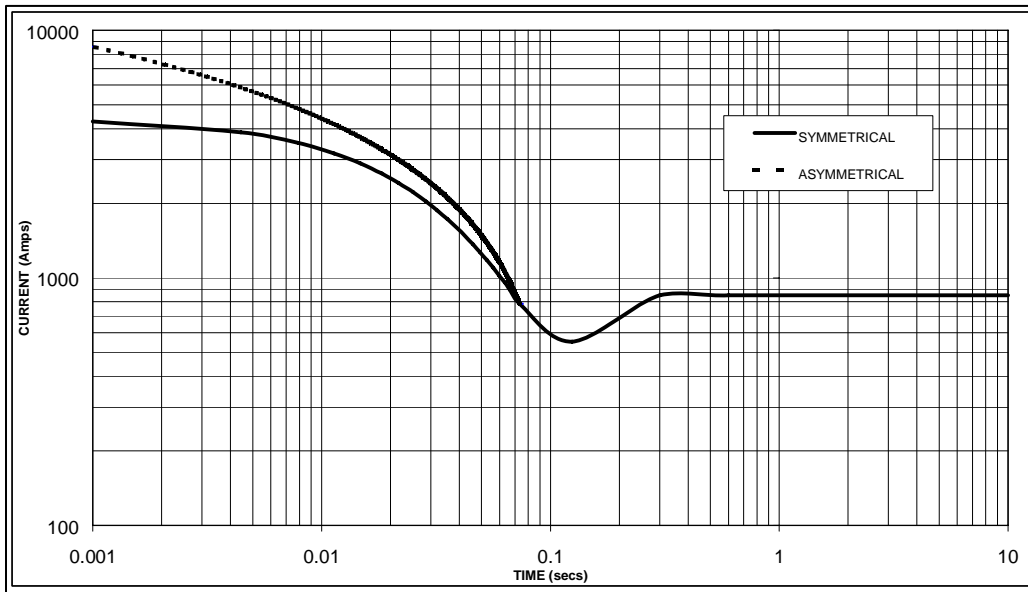

Sustained Short Circuit = 850 Amps

60
Hz

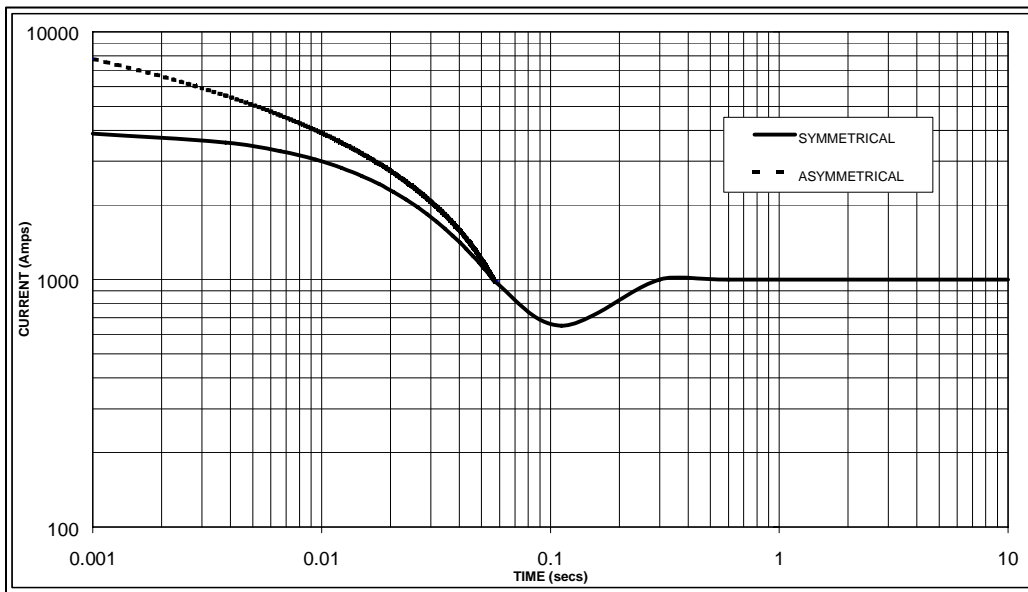

Sustained Short Circuit = 1,000 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.05	440v	X 1.07
415v	X 1.10	460v	X 1.12
		480v	X 1.16

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.


All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

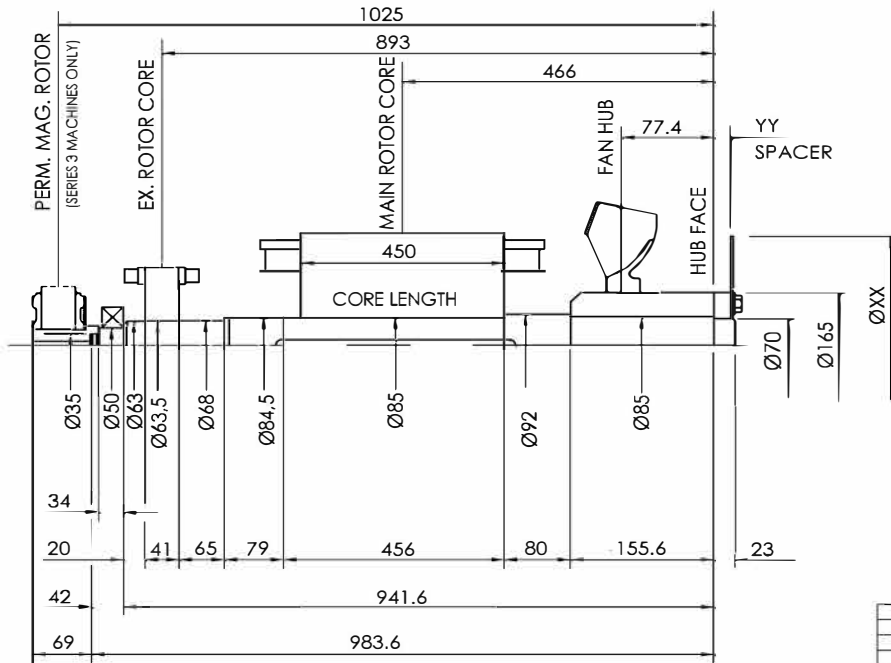

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	12.28	0.0726
MAIN ROTOR	185.78	2.0274
FAN	8.47	0.157
SHAFT	40.826	0.0353
HUB	19.805	0.0861
TOTAL	266.461	2.3594
PERM. MAG.	5.450	0.0150
TOTAL	272.611	2.3934

COUPLING SAE No	COUPLING DIMEN's		COUPLING ASSEMBLY WEIGHT kg	COUPLING DISC J kgm ²
	XX	YY		
* 10	314	14.3	5.55	0.0266
! 11 ¹ / ₂	352	14.3	4.95	0.0423
! 14	467	-	4.74	0.1317

VER	MOD	DRW	Date	1:1
Design		APP		
CHK		Date	2018.01	mm

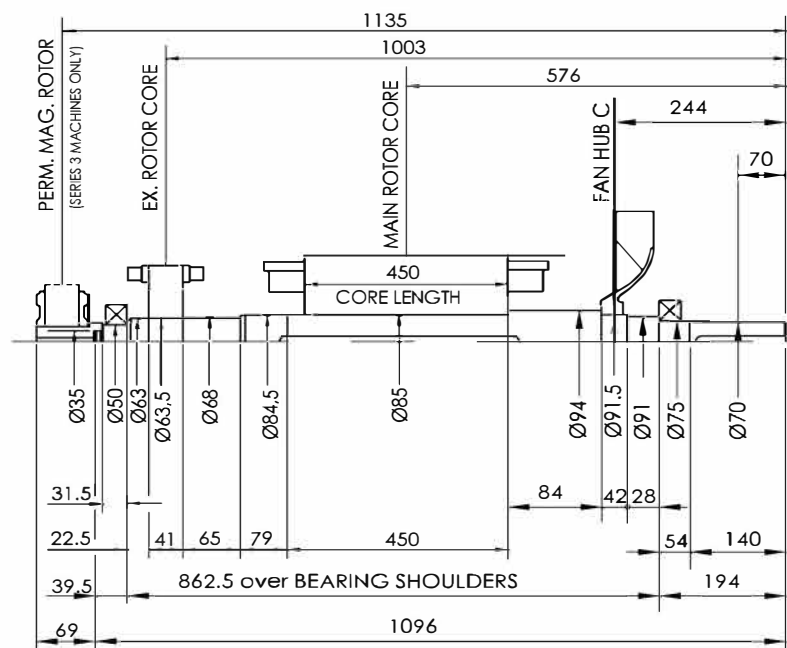

COMPONENT	Wt kg	J kgm ²
EX. ROTOR	12.28	0.0726
MAIN ROTOR	200.195	1.93
FAN	3.389	0.0709
SHAFT	43.136	0.0367
TOTAL	259	2.1102
PERM. MAG.	5.450	0.0150
TOTAL	300.45	2.1252

VER	MOD	DRW	Date	1:1
Design		APP		
CHK		Date	2018.01	mm

